


2215 Series

Pin Header 1.27mmX1.27mm(0.050"X0.050")

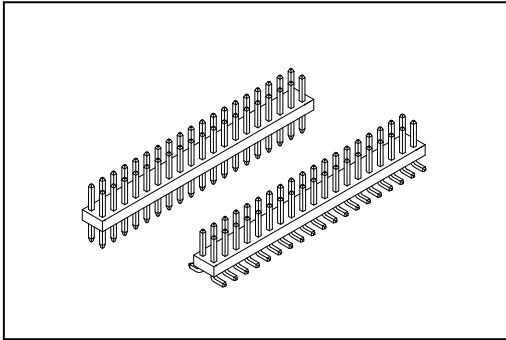

Material:

Housing: High Temperature Plastic UL94V-0. withstands IR and VPR soldering methods.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 500V.

Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.








Operating Temperature: -40°C~+105°C.

Max Processing Temperature: 230°C for 30~60 seconds.

Features:

- * Choice of through-hole and surface mount.
- * Low profile 1.0mm(0.0395").
- * Custom design offered.

Mates with: 2241,2242,2243,2249.

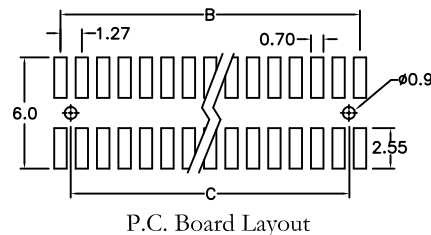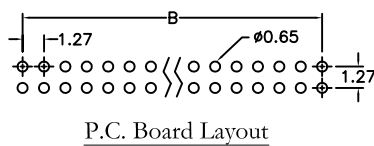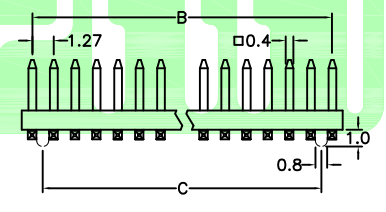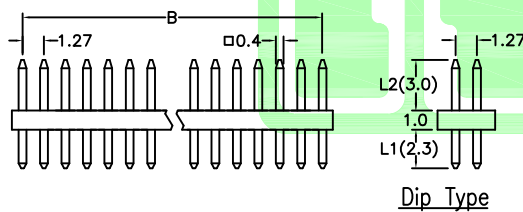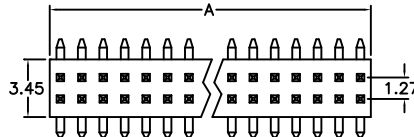

Position	4 Thru 100
Dimension	
A	1.27 X No. of Positions /2
B	1.27 X No. of Positions /2-1.27
C	1.27 X No. of Positions /2-2.54

Ordering information

2215- 2 X 50 G 00 S P/L1 /L2 B
 Series Double Row No. of Pin Per Row G: Gold Plated T: Tin Plated 00: G/F S: Straight D: SMD Type *P: With Post *N: Without Post B: Bulk Package U: Tube Package

Custom Design: Straight (i.e. 2215-2 X 50 G 00 S/L1 /L2)
 Surface mount (i.e. 2215-2 X 50 G 00 D P/L2)

L1: Dip Length
 L2: Mating length

*Only Apply to SMD Type